



GLOBAL TIMBER.



**SUPPLIER OF HARDWOOD
DECKING & CLADDING**

FSC® Garapa decking, untreated



CHOOSE A WOODEN DECK

Hardwood is very suitable for the Nordic climate and therefore also sublime for decking.

The life cycle of a hardwood product is up to five times longer than products in more softer wooden species. Choosing a hardwood deck is a sustainable choice, consideration the environment.

Our well-stocked warehouse of quality hardwoods offers popular species with unlimited possibilities.

We offer a wide selection of hardwood, including a wide selection of decking and cladding boards with several dimensions. We also offer custom profiles upon request.

Wood is a 100% natural resource and as a raw material, there is no material more environmentally friendly. It is important to us that we take good care of the forests, from which our wood originates from. We guarantee our customers a product with a clean conscience and consideration for the environment. That is why, we also are a able to offer most of our species in our range as FSC®-certified.





FSC® Cumaru decking, untreated / FSC® Mahogany, Sapele lists, untreated

CHOOSE A WOODEN DECK

Comparison Chart on wooden decks.
Scale 1-5, where 1 is being the best

SPECIE	DENSITY KG/M3	DURABILITY	STABILITY	FRICTION	COLOR EXTRACTION*	GENEREL ASSESSMENT
IPÉ	abt. 1100	1	1	1	1	excellent
LIGNIA	abt. 650	1	1	1	1	excellent
CUMARU	abt. 1000	2	2	1	1	more suitable
GARAPA	abt. 850	2	2	2	1	more suitable
THERMO ASH	abt. 600	2	2	2	1	suitable
BANGKIRAI	abt. 950	2	2	3	3	suitable
CANGA	abt. 850	2	3	3	3	suitable
PLANTATION TEAK	abt. 650	3	3	3	3	suitable
GUARIUBA	abt. 750	3	3	3	3	suitable
JATOBA	abt. 1000	2	4	3	4	suitable
FAVA AMARGOSA	abt. 800	3	3	3	3	suitable
SUCUPIRA	abt. 900	3	3	3	3	suitable
OAK	abt. 650	2	3	3	4	suitable
THERMO PINE	abt. 450	5	3	4	2	less suitable
LARCH	abt. 550	5	4	4	2	less suitable
IMPR. PINE	abt. 450	5	4	4	2	less suitable

**Color extraction: rarely (eg. on walls).
Be aware of color extraction when used for balconies or free-hanging constructions.*



Smooth / Smooth



Reeded / Smooth

Special profiles can be made upon request.
Most species in our inventory can be offered as FSC®-certified (FSC® C018269).
Call us for further information and inquiries phone no. +45 48 27 00 00.

CUMARU

Dimension	20 x 140 mm 21 x 145 mm
Profile	Smooth / Smooth
Origin	South America
Durability	Class 1 (according to EN standards)
Stability	2 (scale 1-5, whereas 1 is being the best)



JATOBA

Dimension	21 x 145 mm
Profile	Smooth / Smooth & Rillet / Glat
Origin	South America
Durability	Class 1 (according to EN standards)
Stability	3 (scale 1-5, whereas 1 is being the best)



IPÉ

Dimension	20 x 140 mm 21 x 145 mm 20 x 185 mm
Profile	Smooth / Smooth
Origin	South America
Durability	Class 1 (according to EN standards)
Stability	1 (scale 1-5, whereas 1 is being the best)



GARAPA

Dimension	21 x 145 mm 25 x 145 mm
Profile	Smooth / Smooth
Origin	South America
Durability	Class 1-2 (according to EN standards)
Stability	2 (scale 1-5, whereas 1 is being the best)



GUARIUBA

Dimension	21 x 145 mm
Profile	Redded / Smooth
Origin	South America
Durability	Class 2 (according to EN standards)
Stability	3 (scale 1-5, whereas 1 is being the best)



LIGNIA

Dimension	21 x 145 mm
Profile	Smooth / Smooth
Origin	New Zealand
Durability	Class 1 (according to EN standards)
Stability	1 (scale 1-5, whereas 1 is being the best)




FAVA AMARGOSA

Dimension	21 x 145 mm
Profile	Redded / Smooth
Origin	South America
Durability	Class 2-3 (according to EN standards)
Stability	3 (scale 1-5, whereas 1 is being the best)




BANGKIRAI

Dimension	21 x 145 mm 25 x 145 mm
Profile	Redded / Smooth
Origin	Asia
Durability	Class 2 (according to EN standards)
Stability	2 (scale 1-5, whereas 1 is being the best)



THERMO ASH

Dimension	21 x 145 mm
Profile	Smooth / Smooth
Origin	Europe
Durability	Class 1 (according to EN standards)
Stability	2 (scale 1-5, whereas 1 is being the best)



OAK

Dimension	21 x 145 mm
Profile	Smooth / Smooth
Origin	Europe
Durability	Class 1 (according to EN standards)
Stability	3 (scale 1-5, whereas 1 is being the best)



CANGA

Dimension	21 x 145 mm
Profile	Smooth / Smooth
Origin	South America
Durability	Class 2 (according to EN standards)
Stability	3 (scale 1-5, whereas 1 is being the best)



PLUGS

Dimension	D15 mm (thickness 10mm)			
Species		Ipé		Jatoba
		Cumaru		Guariuba
		Garapa		Fava Amargosa
Other species are available upon request.				



We recommend Gluing with water proof glue and sanding to deck level after hardening.


HARDWOOD UNDERDECKING

Dimension	42 x 70 mm
Distance	By 20-21 mm thickness - max. 50 cm By 25 mm thickness - max. 60 cm By 21 mm thickness Ash - max. 40 cm

We recommend Global Timber recommends hardwood underdecking for longer durability and better stability of the decking boards.



POSTS

Dimension	90 x 90 mm
Træsart	 Cumaru



OUR RECOMMENDATIONS

We recommend reading our *Worth knowing about hardwood deckings* before installation.

Our recommendations can be found in the extension of the relevant wood species data sheet at globaltimber.dk or can be acquired by contacting our sales team directly at sales@globaltimber.dk.

FSC® Mahogany, Sapele lists, untreated



CREATE A WELCOMING ENVIRONMENT WITH CLADDING


Wood is an absolute fantastic material, also as facade cladding. Hardwood is a strong material and has a long life.

A wooden facade gives an architectural look with depth, warmth and creates a natural feeling. Most of our wooden species can be used with or without surface treatment. If you choose to leave the cladding untreated, you will obtain beautiful silver-gray patina due to wind and weather.


Global Timber offers edged hardwood to the list industry. We supply the construction industry both for interior and exterior use, as well as the production of profiles for facades.



TOUNGUE & GROOVE

Dimension	16 x 118 mm 21 x 143 mm
Description	Cladding programme with smooth surface. Available as FSC®-certified.
Species	 Mahogany, Sapele Other species are available upon request.

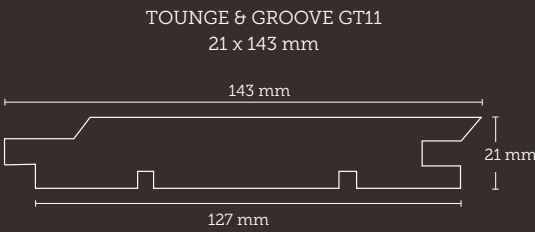





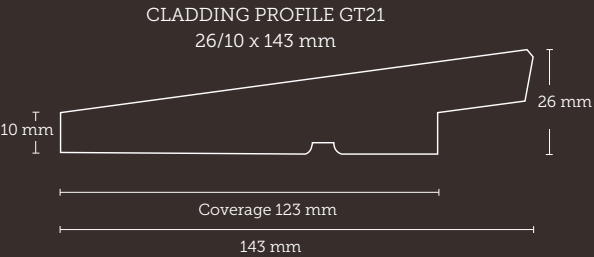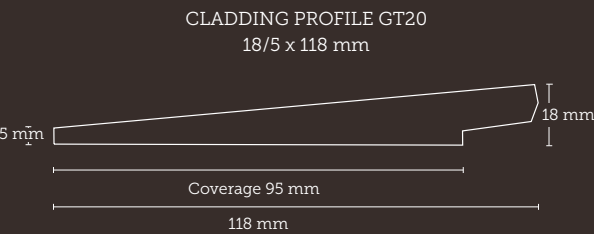




CLADDING PROFILE


Dimension	18/5 x 118 mm 26/10 x 143 mm
Beskrivelse	18/5 x 143 mm rough surface 26/10 x 143 mm smooth surface Available as FSC®-certified.
Træsorter	 Mahogany, Sapele Other species are available upon request.



MOULDINGS

Dimension	20 x 43 mm 43 x 43 mm Other species are available upon request.
Description	Moulding. S4S. Available as FSC®-certified.
Usage	Can be used inside and outside, depending on the type of wood and project. Contact our sales team about the possibilities installing mouldings.

Species	 Mahogany, Sapele	 Ash
	 Cumaru	 Ash, termo treated
	 Garapa	 Ceder Western Red
	 Ipé	 Oak
	 Lignia	

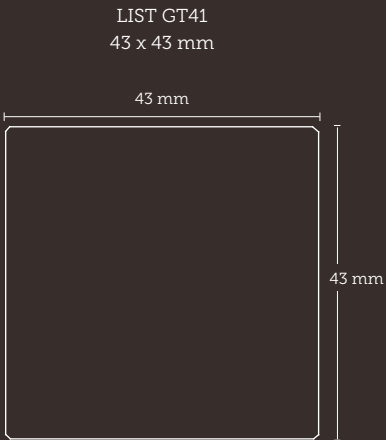

A LARGE SELECTION OF SAWN WOOD FROM AROUND THE WORLD

Global Timber offers Northern Europe's largest stock of hardwood timber. We offer a large selection of square- and un-edged hardwood. For more information about a specific specie, please visit europe.globaltimber.net or contact our sales team on +45 48 27 00 00.

	Abachi/Ayous		Elm, American
	Ash, American		Garapa
	Ash, European		Ipé
	Ash, Thermo treated		Iroko
	Azobe		Jatoba
	Basswood		Kempas
	Beech		Lignia
	Birch		Mahogany, Khaya
	Bilinga		Mahogany, Sapele
	Bubinga		Mahogany, Sipo
	Cedar Western Red		Maple, American
	Cherry, American		Maple, European
	Cumaru		Meranti
	Denya		Merbau
	Douglas		Oak, European

	Oak, Red American		Southern Yellow Pine
	Oak, White American		Tali
	Oak (smoaked)		Teak
	Oregon Pine		Walnut
	Poppel, American		Wengé
	Red Alder		Zebrano





CONTACT

T +45 48 27 00 00
mail@globaltimber.dk

europe.globaltimber.net

HEADQUATER & WAREHOUSE

a/s Global Timber
Michael Drewsens Vej 1
8270 Hoejbjerg, Aarhus
Denmark